


Moyeu expansible en acier KBS51



Tolérances recommandées :
Arbre h8
Moyeu H8

Référence de commande **KBS51** - **20** x **30**
Type ↑ Ø d ↑ Ø D ↑

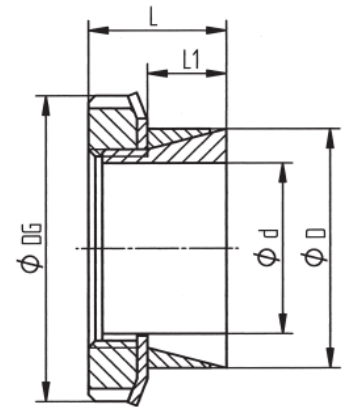

Caractéristiques dimensionnelles et techniques

Dimensions du moyeu expansible					Couple transmissible	Ecrou		Masse
Ø d mm	Ø D mm	Ø D ₆ mm	L mm	L1 mm	T Nm	Taille	Couple serrage Nm	kg
14	25	32	17	6.5	52	M20x1	95	0.05
15	25	32	17	6.5	56	M20x1	95	0.05
16	25	32	17	6.5	60	M20x1	95	0.04
17	25	32	17	6.5	65	M20x1	95	0.04
18	30	38	17.5	6.5	91	M25x1.5	160	0.08
19	30	38	18	6.5	96	M25x1.5	160	0.08
20	30	38	18	6.5	102	M25x1.5	160	0.08
22	35	45	18	6.5	115	M30x1.5	220	0.11
24	35	45	18	6.5	139	M30x1.5	220	0.09
25	35	45	18	6.5	144	M30x1.5	220	0.10
28	40	52	18	6.5	215	M35x1.5	340	0.12
30	40	52	20	8	130	M35x1.5	340	0.13
32	45	58	22	8	315	M40x1.5	480	0.19
35	45	58	22	8	331	M40x1.5	480	0.17
36	45	58	22	8	340	M40x1.5	480	0.17
38	50	65	25	10	450	M45x1.5	680	0.23
40	50	65	25	10	477	M45x1.5	680	0.24
42	55	70	26	10	580	M50x1.5	870	0.30
45	55	70	26	10	617	M50x1.5	870	0.28
48	60	75	26	10	669	M55x2	970	0.33
50	60	75	26	10	697	M55x2	970	0.35
55	65	80	27	12	796	M60x2	1100	0.36
56	68	80	27.5	12	620	M60x2	1100	0.34
60	70	85	29	12	946	M65x2	1300	0.42
63	79	92	30.5	13.5	890	M70x2	1300	0.56
65	79	92	30.5	13.5	920	M70x2	1300	0.52
70	84	98	31.5	13.5	1433	M75x2	2000	0.52

Substitution* à GERWAH PSV-4051
RINGBLOCK RB-1500
TOLLOK TLK-250L

*dimensions et caractéristiques à vérifier selon tableaux ci-dessus.

A.C.C.&S. SAS

57 rue de la Grossau - F-67100 STRASBOURG
tél : +33 [0]3 88 55 94 94 / fax : +33 [0]3 88 55 94 95
infos@acces.ac / www.acces.ac